

*PSI pipelines  
Integrated Solutions for  
Leak Detection and  
Pipeline Monitoring*

PSI 

*The information contained herein is the property of PSI Software AG. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means without the prior written permission of PSI Software AG. The information provided in this document contains descriptions or characteristics of performance which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice. PSI Software AG acknowledges the trademark claims of all manufacturers of third party products mentioned in this document.*

# Introduction

PSIpipelines is a field-proven suite of operational applications which are used to quickly identify critical situations, to track what is happening throughout a pipeline, to check certain conditions before execution, to maintain the integrity of pipelines and to allow operators to react instantly to all conditions.

This highly available and reliable system has been developed to guarantee

that the strict requirements for the transportation of liquids and gases are met. The liquids and gases concerned may be crude oil, natural gas, liquified gas, petrochemical products, water and other liquid or gaseous products.

PSIpipelines can also effectively be deployed for multi-batch pipelines to monitor the movement of different fluid compositions.




**PSIpipelines provides a platform for**

- Leak Detection and Location
- Hydraulic Profiles
- Scraper Tracking
- Batch Tracking
- Density Tracking
- Temperature Tracking
- Velocity Monitoring
- Flow Path Detection
- DRA Management
- Pipeline Stress Monitoring
- Inventory Monitoring
- Wall Roughness Monitoring
- Predictive Simulation
- What-If Simulation
- Pump Monitoring and Operation Improvement
- Pipeline Operation Analysis
- Tank Farm Management

# Integrated Solutions

Fully integrated solutions are perfectly matched applications utilising software and hardware for cost-effective implementations, high system performance, high reliability, outstanding quality, efficient engineering, safe operations and reduced costs for services and training.

PSIpipelines unique scalable architecture supports different levels of integration with SCADA systems, instrumentation and field devices. PSIpipelines can integrate easily with any third party SCADA system and other applications across diverse operation environments.

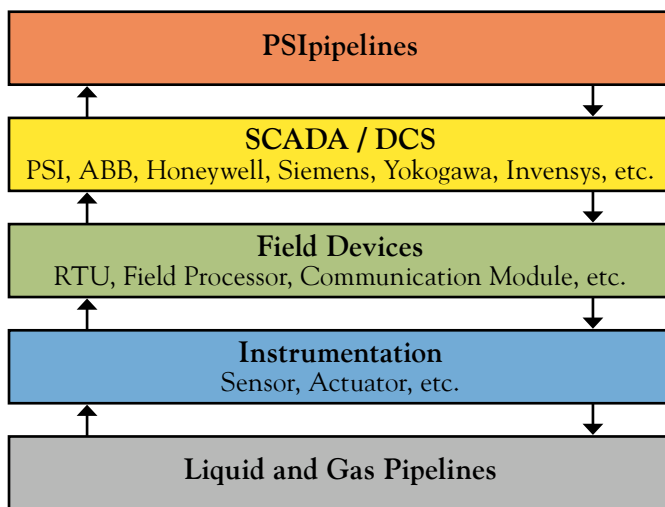

It supports multiple international standards like OPC, Modbus, IEC and other protocols with minimal configuration to transfer data to and from SCADA servers. PSIpipelines can seamlessly integrate with PSIcontrol SCADA system which has been specifically developed for the monitoring and control of pipelines. Customers benefit from a consist-

ent look-and-feel across products, optimal system performance, efficient implementation, shared access to all engineering tools, reduced training costs and a single point of service.

PSI provides integrated leak detection solutions for upstream and downstream oil and gas pipelines through advanced hardware combined with the PSIpipelines software platform. The hardware components of PSI integrated solutions include dedicated Leak Remote Units (LRU) equipped with GPS synchronization, high analogue-to-digital resolution (above 12 bits depending on hardware model) and buffering capabilities to overcome communication failure without field data loss. The buffering capabilities as well as data scanning and processing time are configurable. The fast scan high resolution platform allows the running of sophisticated PSIpipelines Pressure Wave Analysis and Pattern Recognition applications to resolve leak detection and location. Based on the distributed smart-processing hardware platform pipeline leaks can be detected directly by Leak Remote Units which provide various types of programmable outputs for pump shut-downs, isolation valves or local alarming purposes. The smart-processing features embedded in the hardware of PSI integrated solutions further boosts PSI leak detection capabilities in order to achieve fast response actions to line-ruptures while minimizing the communication bandwidth requirements for the applications.

# *Scalability and Flexibility*

Every project is different, and will vary according to the size of a pipeline system, project budget and operational requirements. PSIpipelines is a highly scalable system that provides all parts of a solution that are needed for the day to day operation.

All PSIpipelines applications are built on top of a common set of subsystems including real-time database, data historian, real-time transient model, tracking system, alarm and warning subsystem, data acquisition, data processing and data validation, network communication and data exchange, SCADA integration, redundancy management with automatic fail-over functionality, user permission management and a graphical user interface with a familiar Windows look and feel and multi-language support.

The inherent flexibility of the system ensures that an existing solution can expand as the pipeline system expands up to large scale hydrocarbon transporting and distribution networks without project-specific code changes. In order to support maximum flexibility, scalability and efficient project implementation PSIpipelines provides all engineering tools for database and pipeline system configuration, graphical screen design, pipeline modelling, user management and other configuration tools.

The utilisation of the modular PSIpipelines platform and engineering, development and service expertise enables PSI to be a strategic partner for many customers to implement tailor-made solutions if standard solutions are not adequate.




# Fundamental Components

## Real-Time Transient Model

The PSI Real-Time Transient Model (RTTM) is the fundamental component of PSIpipelines. It simulates the hydraulic behaviour and thermodynamics of the flow at each point of the pipeline and compares in real-time the calculated

values with the actual data. The system receives measurements from instrumentation (e.g. flow, pressure, temperature, density, etc.) and updates the model on a fixed cycle basis. The calculations include regular solving of hydraulic, thermodynamic and state equations taking into account the properties of the pipeline and fluid, instrumentation and equipment, state variations and the heat exchange with the surroundings. Based on a complete and accurate mathematical representation the PSIpipelines RTTM represents the pipeline state under any operating condition and pro-

vides accurate information to the operator and associated applications. The model is also capable to take wax and drag reduction agents into account. The PSIpipelines RTTM is very robust in handling bad or inconsistent data and

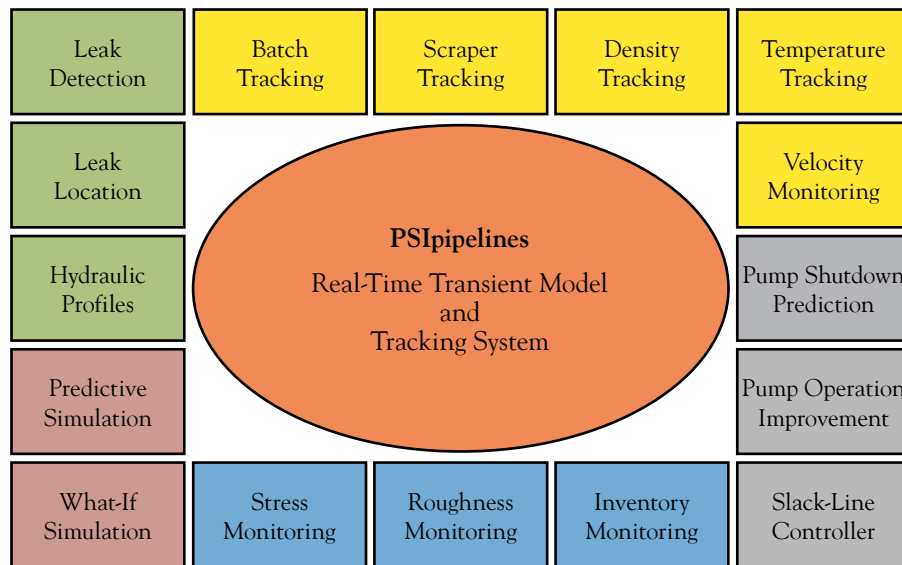

values with the actual data. The system receives measurements from instrumentation (e.g. flow, pressure, temperature, density, etc.) and updates the model on a fixed cycle basis. The calculations include regular solving of hydraulic, thermodynamic and state equations taking into account the properties of the pipeline and fluid, instrumentation and equipment, state variations and the heat exchange with the surroundings. Based on a complete and accurate mathematical representation the PSIpipelines RTTM represents the pipeline state under any operating condition and pro-


ensures that faulty input data will not cause instability or shut-down of the complete system. It contains auto-tuning and self-adaption functions to improve results during pipeline operation and to detect negative drifts that may occur. Even though the capability of the modelling software is determined by pipeline design and instrumentation, the software itself imposes no limitations on the performance of the overall system. In environments with many different pipelines that transport different fluids and gases, the model is able to handle all pipelines at the same time.



## Tracking System

The PSIpipelines Tracking System is another fundamental component and closely integrated with the PSIpipelines Real-Time Transient Model. The Tracking System provides complete linefill information for all associated applica-

calculates and provides the exact arrival time and velocity of all linefill elements. Operators are informed in good time before a batch arrives at a pump station or pipeline branch.

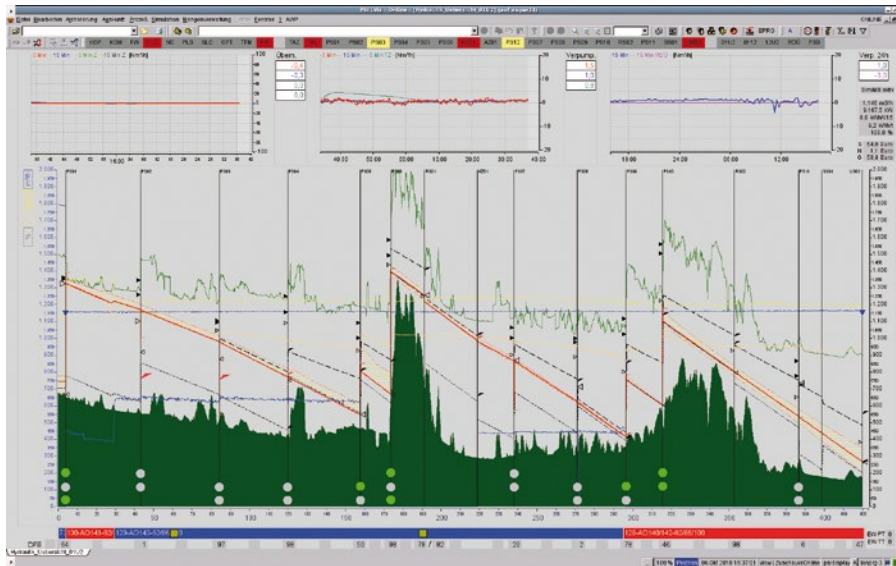

tions and keeps all data reliable even if a pipeline topology has been changed. With its powerful and proven methods the tracking system covers all requirements for accurate tracking of scrapers, batches, products, densities and temperatures. The tracking system is able to handle any mixing and splitting point. It uses scraper signals in order to correct automatically their position and generates warnings whenever valve stations are approached. The Tracking System

## Hydraulic Profiles

The PSIpipelines Real-Time Transient Model provides high-resolution real-time hydraulic profiles. These profiles help the operator to identify pressure excursions, liquid dropout, gas breakout or drifts of instrument performance. The system displays various profile plots with both actual and simulated data on the screen including Pipeline Elevation, Pressure, Flow, Temperature, Density, Velocity, Maximum and Minimum Operating Pressure.

# Leak Detection and Location

Leaks can be caused by third-party intervention, ground movement or corrosion, but also by improper operating procedures and material failure. PSIpipelines provides several methods for leak detection and location.

The selection of appropriate methodology depends upon instrument availability, field devices, communication infrastructure, transported fluids and gases and performance criteria. PSIpipelines Leak Detection System does not depend on special instrumentation and field devices, but the overall system performance improves if integrated with ultra-fast scanning sensors and dedicated Leak Remote Units with sufficient processing power.

PSIpipelines Leak Detection System is the most accurate solution for long

Detection System is compliant to international and industry standards including API 1155 / 1130 and TRFL – German Regulations for Pipelines. PSIpipelines Leak Detection System is also certified by all TÜV organisations.

In combination with statistical analysis PSIpipelines Leak Detection System provides model-based methods (Model Compensated Mass Balance, Transient Model, Pressure-Temperature Method and Gradient Evaluation) and methods that utilise the signature of a leak (Pressure Wave Analysis, Pattern Recognition).

Methods are optimised to detect and to locate leaks accurately during steady state, shut-in and transients operations for onshore and offshore pipelines of all sizes. The different methods can be deployed in parallel in order to ensure the highest possible reliability. PSIpipelines Leak Detection System has been designed to handle many pipelines as well as pipeline segments for different fluids and gases in one single solution. The system takes available data from composition analysis and density measurements also into account if the conditions of transported products change.

Any invalid measurements or field device malfunctions will not cause a shutdown of the PSIpipelines Leak Detection System. All leaks are clearly indicated and presented graphically via the PSIpipelines graphical user interface. This interface is highly customisable and provides significant information to the operator. Leak warnings and alarms are also sent to the SCADA system.



distance pipelines with intermediate pumps, extreme elevations and slack line flow conditions. PSIpipelines Leak



# *Real-Time and Offline Simulations*

## **Predictive Simulation**

During steady-state operations the hydraulic conditions may change. If a pipeline transports different products of different compositions the conditions will change slowly so that a previously chosen optimal mode of operation might become more and more inconvenient. The PSIpipelines Predictive Simulation module identifies in advance any negative drift to undesirable hydraulic conditions. The system detects the process element that is going to reach a certain threshold and calculates the exact time at which the event will occur. The operator then can adjust pump switches or modify set points. A predictive simulation runs on a cyclical basis. It can be started either manually by the operator or it runs permanently in the background. The resulting simulation values for flow, pressure, density, etc. are stored in the same database as any real-time measurements and thus can be applied by any other module and subsystem.

## **What-If Simulation**

In multi-batch pipeline operations it is essential to know in advance the consequences of operator-initiated actions. Based on Real-Time Transient Model data, pump switch settings, modified set points, flow path variations and other information the PSIpipelines What-If Simulation calculates the corresponding process values.

## **Training System**

The PSIpipelines Offline Simulation contains a transient model of the pipeline system along with a facility simulation kit for pump control, valve control and for the emulation of control loops. The offline simulation system is the basis for PSIpipelines Training System.

The Training System exactly replicates the real process and provides all functions for leak detection and pipeline monitoring simulation. The hydraulic offline simulation replaces the complete pipeline process as modelled in a real solution. The virtual control system converts operator commands into process information and emulates control loops.



# Improved Pump Operations

## Energy Efficient Pump Operations

The reduction of pumping costs and energy consumption is a major objective for all pipeline operating companies. Optimal pumping is essential to keep the lifetime of pipelines. In order to obtain the required flow within a pipeline the Pump Optimisation module utilises the pressure and flow characteristics and pump efficiency curves as well. Based on the Real-Time Transient

## Pump Shutdown Monitoring

Pipelines are equipped for safety reasons with special shutdown and controlling devices. PSIpipelines Shutdown Monitor follows the same logic as for emergency control and shutdown, but permits the setup of different thresholds. The system triggers warnings before any action in the field is automatically started.



Model and actual hydraulic conditions like linefill, pipe friction factor, etc. the system determines the most efficient pump operations and provides the results to the operator.

# *Pipeline Integrity and more*

## **Pipeline Stress Monitoring**

The total lifetime of a pipeline segment is limited and depends on operational procedures. In order to predict material fatigue it is important to monitor the stress that is caused by pipeline pressures. If most pump operations are performed during steady state with only a few interruptions, the impact on the total lifetime is much less than during transient conditions.

Based on actual pressure values for monitored pipeline segments which are stored continuously in the database, the PSIpipelines Stress Monitor analyses permanently pressure trend curves, determines maximum and minimum possible thresholds and calculates the impacts of pressure changes. When the pipeline approaches the end of its lifetime the system generates appropriate messages for further actions that should be initiated by the operator. The system executes calculations in accordance to TÜV AD S1 and S2 technical rules (Analysis for cyclic loading).

## **Pipeline Wall Roughness Monitoring**

Pipeline configuration, wall roughness and pipe friction factor are usually defined as standard values during design stage. Any changes of these values will be compensated by the Real-Time Transient Model tuning methods. Tuning factors which are calculated for each

pipeline segment are also monitored against thresholds. The PSIpipelines Wall Roughness Monitor triggers alarms to indicate new scraper runs.

## **Pipeline Inventory Monitoring**

During operation days a pipeline contains different amounts of products, which is caused by temperature and pressure variations. PSIpipelines Inventory Monitor stores the quantities of all pipeline segments in the real-time database and compares each quantity to all threshold levels. The system determines the quantities for each pipeline segment and also for every product in multi-product pipelines.

## **Density Monitoring**

If batches of different products are transported through the same pipeline the operator needs precise information about the moment when the flow path shall be changed. The PSIpipelines Density Monitor identifies the expected density trend and presents all batches and mixing zones fully graphically on the screen. Based on this information the operator decides at which part of the mixing zone the flow path shall be changed in order to avoid any contamination at the delivery point.

# Engineering, Training and Support

## Engineering

System Design, Project Management, Engineering, Test and Commissioning include:

- Project organisation and resources management,
- Preparation and execution of reviews and meetings,
- Project schedule supervision,
- Quality control,



- Preparation of System Design Documents,
- Hardware setup and configuration,
- Software setup and configuration,
- Real-Time Transient Model design and engineering,
- System integration with SCADA,
- Tests and Model tuning,
- Preparation and execution of commissioning and tests,
- Preparation of user manuals.

## Training

Training courses for operators, system administrators and maintenance personnel include:

- Basics of the Real-Time Transient Model and Tracking System,
- PSIpipelines data visualisation and human machine interface,
- Leak detection and location methods,
- PSIpipelines modules,
- System and engineering tools.

## Support

PSI provides maintenance services for PSIpipelines software after project acceptance. Depending on customer and operational requirements the following services are provided:

- 24/7 support and operational services,
- Mirror installation in PSI facilities,
- Services to correct detected faults and application support,
- Preventative maintenance and system management,
- Services at the client's request (e.g. changes and adaptations to software and configuration)
- Individual customer services and developments.

## Company

PSI develops and integrates software solutions and complete systems for liquid and gas pipelines, electricity networks, manufacturing plants and public transportation.

From the very beginning PSI's business focus has been clearly-defined: Close cooperation with its customers. The key to success lies in a comprehensive understanding of customers' core business processes. This enables PSI to deliver intelligent, high-tech solutions today whilst developing technical innovations that will shape the future. The company was founded in 1969 and currently employs 1,620 individuals world wide. In financial year 2016 the Group achieved revenues of 176,9 million Euros. The PSI Software AG is listed in the Prime Standard of the German stock exchange.

## Quality Management

PSI has a policy of constant development and improvement of its products and has a formal quality management system that was first certified to be in compliance with ISO9001 in 1994. The quality management system is re-certified every three years.



The image shows a formal ISO 9001:2008 certification certificate. On the left side, there is a vertical blue bar with the word 'CERTIFICATE' repeated in multiple languages: English, German, French, Spanish, Chinese, and Japanese. The main body of the certificate is white with black text. At the top right is the TÜV SÜD Management Service logo. The title 'ZERTIFIKAT' is prominently displayed in large, bold letters. Below it, the certifying body is identified as 'Die Zertifizierungsstelle der TÜV SÜD Management Service GmbH'. The certificate states that the company 'PSI Software AG' is certified for the scope of 'Entwicklung und Vertrieb von Leitsystemen und Softwarelösungen für Versorger, Industrie und Infrastrukturbetreiber, sowie Erbringung ergänzender Dienstleistungen'. The certificate number is '12 100 4336/01 TMS' and it is valid from 04.09.2017 to 21.06.2018. At the bottom, there is a signature, the TÜV SÜD logo, and the IAF and DAKKS logos. The footer contains contact information for TÜV SÜD Management Service GmbH in München, Germany.

**ZERTIFIKAT**

Die Zertifizierungsstelle  
der TÜV SÜD Management Service GmbH  
bescheinigt, dass das Unternehmen

**PSI**  
**PSI Software AG**

Dircksenstraße 42-44, 10178 Berlin, Deutschland  
Boschweg 6, 63741 Aschaffenburg, Deutschland  
Ruhrallee 201, 45136 Essen, Deutschland

für den Geltungsbereich

Entwicklung und Vertrieb von  
Leitsystemen und Softwarelösungen  
für Versorger, Industrie und Infrastrukturbetreiber,  
sowie Erbringung ergänzender Dienstleistungen

ein Qualitätsmanagementsystem  
eingeführt hat und anwendet.

Durch ein Audit, Bericht-Nr. 7009718,  
wurde der Nachweis erbracht, dass die Forderungen der

**ISO 9001:2008**  
erfüllt sind.

Dieses Zertifikat ist gültig in Verbindung  
mit dem Hauptzertifikat vom **04.09.2017** bis **21.06.2018**.  
Zertifikat-Registrier-Nr.: **12 100 4336/01 TMS**.

*M. Wegner*  
Product Compliance Management  
München, 04.09.2017

Seite 1 von 1

TÜV SÜD Management Service GmbH • Zertifizierungsstelle • Rillenstraße 65 • 80339 München • Germany  
www.tuv-sud.de/zertifikate-validity-check

IAF DAKKS

TÜV®

# References

Company	Project	Scope of Supply
Kuwait Oil Company	Gas and Condensate Pipeline Network	Pipeline Leak Detection System Scraper Tracking Predictive Simulation Detection of instrument malfunctions Pipeline Roughness Monitoring (SCADA: ABB)
Kuwait Oil Company	40" Gas Pipeline	Pipeline Leak Detection System (SCADA: ABB) Extension to Gas and Condensate Pipeline Network
Kuwait Oil Company	BS160 Gas and Condensate Pipelines	Pipeline Leak Detection System (SCADA: ABB) Extension to Gas and Condensate Pipeline Network
Kuwait Oil Company	BS171 Gas and Condensate Pipelines	Pipeline Leak Detection System (SCADA: ABB) Extension to Gas and Condensate Pipeline Network
OMV	Product Pipeline	Pipeline Leak Detection System Batch Tracking Scraper Tracking Pipeline Stress Monitoring Density Monitoring (SCADA: ABB)
Adria-Wien Pipeline	Crude Oil Pipeline	Pipeline Leak Detection System Scraper Tracking Batch Tracking Pipeline Stress Monitoring Tank Farm Dispatching DRA Management (SCADA: PSIcontrol)
Transalpine Pipeline	Crude Oil Pipelines	Pipeline Leak Detection System Scraper Tracking Batch Tracking and Batch Planning System Predictive Simulation Pipeline Stress Monitoring Tank Farm Dispatching (SCADA: PSIcontrol)
RMR	Product Pipelines	Pipeline Leak Detection System Scraper Tracking Batch Tracking (SCADA: PSIcontrol)



Company	Project	Scope of Supply
Saudi Aramco	Karan Offshore Gas Pipelines	Pipeline Leak Detection System (SCADA: Siemens)
Dow Chemical	Product and Gas Pipelines	Pipeline Leak Detection System Scraper Tracking Batch Tracking Pipeline Stress Monitoring Post Mortem Analysis (SCADA: Honeywell)
MVL	Crude Oil Pipelines	Pipeline Leak Detection System Scraper Tracking Batch Tracking Pipeline Stress Monitoring (SCADA: PSIcontrol)
PCK	Crude Oil Pipeline	Pipeline Leak Detection System Scraper Tracking Batch Tracking (SCADA: PSIcontrol)
PKN Orlen	Product Pipeline	Pipeline Leak Detection System Scraper Tracking Batch Tracking (SCADA: PSIcontrol)
OMV	Crude Oil and Product Pipelines	Pipeline Leak Detection System Pipeline Stress Monitoring (SCADA: HIMA)
LUKOIL	Product Pipeline	Pipeline Leak Detection System Pipeline Stress Monitoring (SCADA: Honeywell)
BayernOil	Product Pipelines	Pipeline Leak Detection System Pipeline Stress Monitoring (SCADA: Invensys)
Celanese	Product Pipeline	Pipeline Leak Detection System Scraper Tracking (SCADA: Yokogawa)
Tatneft	Crude Oil Pipeline	Pipeline Leak Detection System
Transneft	Crude Oil Pipeline	Pipeline Real-Time Simulation System



**PSI Software AG**  
Dircksenstraße 42–44  
10178 Berlin (Mitte)  
Germany  
Phone: +49 30 2801-0  
Fax: +49 30 2801-1000  
[www.psoilandgas.com](http://www.psoilandgas.com)

